



SARRVAD



**SOLAR STREET LIGHT**

MODEL **SELE-01B**  
**16500** <sup>12W</sup> mAh



MODEL **SELE-02B**  
**19800** <sup>15W</sup> mAh



<b>3</b> LIGHTING MODE	<b>Li-PO4</b> BATTERY TYPE	<b>3YR</b> WARRANTY	<b>3.2V</b> BATTERY	<b>Cool White</b> LIGHTING COLOR
---------------------------	-------------------------------	------------------------	------------------------	-------------------------------------

**PRODUCT SPECIFICATIONS**

Model	SELE - 01B	SELE - 02B
Lumens	1200	1500
Solar Panel	9W	10.5W
Battery Type	Li-PO4 3.2V, 16500mAh	Li-PO4 3.2V, 19800mAh
LED	12W	15W
Charging Time	10-12 Hours by Bright Sunlight	
Lighting Time	1-3 Nights	
Lighting Mode	3 Types	
Waterproof	3 Types	
Warranty	IP65	
Dimensions	3 Years	
	46x22x10cm	46x22x10cm



**\*LIGHTING MODE**

**Green** First 5hrs high brightness 100% +25% dim light for next 5hrs with motion detector turns to high brightness for 30 sec. in next 2hrs 100% lighting

**Red** 25% dim light whole night with motion detector turn to 100% brightness for 30 sec

**Yellow** All night 60% till dawn without motion sensor



MODEL **SELE-20** SERIES  
 12-36 Ah 20 - 60W



Pole Bracket (ID 60mm)

**PRODUCT SPECIFICATIONS**

Model	SELE - 20-20W	SELE - 20-30W	SELE - 20-40W	SELE - 20-50W	SELE - 20-60W
Lumens	2000	3000	4000	5000	6000
Solar Panel	18W	25W	32W	40.5W	51.3W
Li-PO4 Battery	12.8V, 12Ah	12.8V, 18Ah	12.8V, 24Ah	12.8V, 30Ah	12.8V, 36Ah
LED	20W	30W	40W	50W	60W
Charging Time	10-12 Hours by Bright Sunlight				
Lighting Time	3 - 5 Nights				
Lighting Mode	3 Types				
Waterproof	IP65				
Warranty	3 Years				
Dimensions (cm)	57x31x12	75x31x12	88x31x12	103x31x12	136x31x12



Cool White  
LIGHTING COLOR

3YR  
WARRANTY

3  
LIGHTING MODE

Li-PO4  
BATTERY TYPE



MODEL **SLL-09**  
2000 **20W** Im



PRODUCT SPECIFICATIONS

Model	SLL-09
Lumens	2000lm
LED	20W/4000K
Power of Solar Panel	16.2W
Battery Spec	3.7V, 31200mAh
Waterproof	IP65
Charging Time	8-10 Hours
Lighting Time	4-5 Nights
Charging	-20°C -65°C
Size	433X156mm
Light Modes	5 Hrs 100% Brightness + 25% till dawn
Material	Aluminium Alloy
Warranty	3 years



<b>11.45wh</b> BATTERY POWER	<b>3YR</b> WARRANTY	<b>20W</b> LED	<b>Neutral White</b> LIGHTING COLOR
---------------------------------	------------------------	-------------------	--

MODEL **SELE-15**  
15600 **20W** mAh

PRODUCT SPECIFICATIONS

Model	SELE-15
Solar Panel	5.5V 20W Polychrystalline Silicon
Battery	3.7V 15600mAh Li-ion Battery
LED	20W 180LM/W 6000K
Material	Aluminium Alloy
Charging Time	11 Hours Under Bright Sunlight
Lighting Time	1-2 Nights
Waterproof	IP65
Warranty	1 Year
Lighting Mode	100% till dawn
Dimensions (cm)	51x18



<b>1YR</b> WARRANTY	<b>20W</b> LED	<b>Cool White</b> LIGHTING COLOR
------------------------	-------------------	-------------------------------------

**SOLAR GARDEN LIGHT**

**MODEL SWESL-25**

**1W**



**PRODUCT SPECIFICATIONS**

Model	SWESL- 15	SWESL- 25
LED	1W/4000K	1W/4000K
Solar Panel	1.6W	1.6W
Battery Type	2.5Ah 3.7V	
Solar Charging	7-8 Hrs by Bright Sunlight	
Lighting Time	2-3 Nights	
Lighting Mode	2 Type	
Material	Aluminium Alloy + ABS + PC	
Waterproof		
Product Size	160X160X264mm	160X160X500mm
Warranty	1 Year	1 Year



**3.7v**  
BATTERY

**1YR**  
WARRANTY

**Cool White**  
LIGHTING COLOR

**MODEL SWESL-15**

**1W**



**SOLAR BARN LIGHT**

**MODEL SWL-50**  
**5000 50W**  
**lm**

**PRODUCT SPECIFICATIONS**

Model	SWI-50
Lumens	5000lm(50W)/ 6000k
LED Quality	50pcs
Power of Solar Panel	14.3W
Battery Specs	66.6Wh(18AH 3.7V)
Waterproof	IP65
Charging Time	8 Hrs
Lighting Time	8 Nights
Discharging Temp	-20 °C - 60 °C
Charging Temp	0 °C - 55 °C
Light Modes with Remote	6 Lighting Modes Indoor / Outdoor
Material	Aluminium Alloy + Glass
Size	349x104x80mm
Warranty	3 Year
Cable Length	3 Meter



**3.7v**  
BATTERY

**1YR**  
WARRANTY

**Cool White**  
LIGHTING COLOR

## SOLAR WALL LIGHT

MODEL **SWL-11**  
 200~1000 **2000mAh**  
 lm



### PRODUCT SPECIFICATIONS

Model	SWL-11
Lumens	200-1000 lm
Solar Panel	0.5W
Battery Type	Li-ion 3.6V, 2000mAh
LED	4000k
Charging Time	10 Hours by Bright Sunlight
Lighting Time	3 Nights
Light Modes	3 Type
Material	Thermal Conductive Plastic
Waterproof	IP65
Warranty	1 Year
Dimensions (cm.)	9x8x5.5



**1YR**  
WARRANTY

**3.6V 2000mAh Li-ion**  
BATTERY mAh

**Neutral White**  
LIGHTING COLOR

## SOLAR HAWKER LIGHT

MODEL **SELE-06S**  
 1000 **10W**  
 lm

### PRODUCT SPECIFICATIONS

Model	SELE-06S
Lumens	1000
LED Quantity	44 LED'S
Power of Solar Panel	6W
Battery Specs	3.2V, 14Ah
Waterproof	IP65
Charging Time	8 Hrs
Lighting Time	3-4 Nights
Discharging Temp	-20 °C - 60 °C
Charging Temp	0 C - 55 C
Light Modes	10W White (Red/ Green/ Blue) (4 Modes)
Material	Aluminium Alloy + Glass
Size	242.5X120.5X92mm
Warranty	3 Year
Cable Length	3 Meter



**1YR**  
WARRANTY

**10W**  
LED



MODEL **SWL-12**  
2000 **20W** Im



PRODUCT SPECIFICATIONS

Power	Epoxy Mono-Crystalline, 1W
Li-ion battery	
Capacity	3.7V 14.8WH
Charging/Discharging Temp	0-40°/-20-60°
Charging Time	10H
LED	20W
Color Temp	4000K
Efficiency	170lm/W
Lighting Time	>10days
Control Mode	Button Switch, ON/OFF Long Press 1.5s
Lighting Mode	M1:50+PIR (2000 Im) / M2:0+PIR (2000 Im)/M3:50Im Till dawn
Mode Indication	M1: Flash for one time, M2: Flash for two times; M3: Flash for three times
PIR	120°, >5m
IP/IK Class	IP65 / IK10
Install Height	3m
Size	114x107x149mm



**1YR** WARRANTY  
**Neutral White** LIGHTING COLOR

MODEL **SWL-15PL**  
1000 **10W** Im

PRODUCT SPECIFICATIONS

Power	Epoxy Mono-Crystalline, 1W
Li-ion battery	
Capacity	3.7V 14.8WH
Charging/Discharging Temp	0-40°/-20-60°
Charging Time	10H
LED	10W
Color Temp	4000K
Efficiency	170lm/W
Lighting Time	>10days
Control Mode	Button Switch, ON/OFF Long Press 1.5s
Lighting Mode	M1(Red): 50Im+PIR (1000) M2(Green): 0+PIR (1000) M3(Orange): 200Im for 6hrs
Mode Indication	M1: Red, M2: Green, M3: Orange
Capacity Indication	Green: ≥70%; Orange: 30%-70%; Red: <30%
PIR	120°, >5m
IP/IK Class	IP65 / IK10
Install Height	1.6m
Size	80x72x225mm



**1YR** WARRANTY  
**Neutral White** LIGHTING COLOR







**SOLAR POWER GENERATOR**

**MODEL S150**  
**42000mAh** **150W**



**PRODUCT SPECIFICATIONS**

Battery	Lithium Ion Battery
Battery Capacity	42000mAh, 3.7V=155Wh (Max version: 52400mAh, 3.7V=194Wh)
Inverter	Modified Shine Wave-150W
Fully Charged Time	DC15V/3A: 6-7 hours
Input Recharging	Adapter: DC15V/3A Solar Panel: MPPT, 14V-22V/3A Max
DC Output	2 x DC5521: 9V-12.6V/10A (14.5A Max)
USB Output	1 x USB-A: 5V/2.4A 1 x USB-A: QC3.0, 5-12V/18W 1 x TYPE-C: PD 5-12V/18W
2W Ultra Bright LED	Flashlight/Blink/SOS
Power Indicator	LCD Display
Lifecycles	500 times
Dimensions	204*91*187mm
Weight	About 1.89kg
Charge Mode	CC/CV
Accessories	1XAC Adapter 1XCar Charger 1XCigarette Lighter Adapter 1XUser Manual
Solar Panel (purchase separately) 30W	

<b>155 Wh</b> BATTERY POWER	<b>150W</b> AC OUTPUT	<b>2</b> USB OUTPUT	<b>12.6V</b> DC OUTPUT	<b>1YR</b> WARRANTY
--------------------------------	--------------------------	------------------------	---------------------------	------------------------

**PRODUCT SPECIFICATIONS**

Model	SPC-PET-30W
Fold	TWO
Solar Panel	30W Sunpower
Efficiency	>23.5%
Material	ETFE+PTE Laminated & Fabricated
Output	5.5-18V*2-1.7A
Output Interface	Smart IC Controller with Single USB USB* 1pc DC* 1pc
Charging Point	DC* 1pc
Waterproof	Yes
Warranty	1 Year
Dimensions (cm)	39x30x3
Folded	39x87x1.25
Unfolded	1 x DC Charging Cable
Package	1 x SAE to DC Conversion Cable
Inclusions	1 x Appple Connector 10 x Laptop Connectors 1 x Aligator Clip



<b>1YR</b> WARRANTY	<b>USB PORT</b>	<b>DC 5521</b>
------------------------	-----------------	----------------

## SOLAR POWER GENERATOR

# MODEL ST200

## 60000mAh

200W



### PRODUCT SPECIFICATIONS

Built-in Battery	High Quality Lithium ion Battery 222Wh (60000mAh/3.7V)
Inverter	Modified Sine Wave - 200W
Solar Panel Input	13V-24V/2.1A Max
Fully Charged Time	DC15V/3A : 6-7 hours
Input Recharging	Adapter : DC 15V/3A
DC Output	4 x DC5521 : 9-12.6V/10A (15A Max)
AC Output	200W
4 USB Output	2 x USB-A : 5V/2.4A 1xUSB-A: QC3.0, 3-12V/ 18W 1xTYPE-C: QC3.0, 3-12V/18W
Ultra Bright LED	Flashlight/Blink/SOS
Weight (KG)	2.4
Dimension (L*B*H)	210x139x123x180mm
Power Indicator	LED Display
Lifecycle	1000

- Package Inclusions
- 1 x Portable solar generator
  - 1 x Power adapter
  - 1 x Car charger
  - 1 x User manual
  - 1 x Solar DC cable 3mtr
- Solar Panel (purchase separately) 50/80W

**222 Wh**  
BATTERY POWER

**200W**  
AC OUTPUT

**200W**  
SINEWAVE

**15A**  
DC OUTPUT

**1YR**  
WARRANTY

## SOLAR MOBILE CHARGER

### PRODUCT SPECIFICATIONS

Model	SPC-PET-50W
Fold	Single Fold
Solar Panel	50W Sunpower
Efficiency	>23.5%
Material	ETFE+PTE Laminated & Fabricated
Output	5.5-18V*2.1-2.7A
Output Interface	Smart IC Controller with Single USB
Charging Point	USB* 1pc DC* 1pc
Waterproof	Yes
Warranty	1 Year
Dimensions (cm)	44x46x3
Folded	88x46x1.25
Unfolded	1 x DC Charging Cable
Package	1 x SAE to DC Conversion Cable
Inclusions	1 x Appple Connector 10 x Laptop Connectors 1 x Aligator Clip



**1YR**  
WARRANTY

**USB**  
PORT

**DC 5521**

## SOLAR POWER GENERATOR

MODEL **ST500**  
**140000** **500W**  
 mAh



### PRODUCT SPECIFICATIONS

Battery	High Quality Lithium Ion Batteries
Battery Capacity	518Wh/14000mAh, 3.7V
Weight	About 6.6KG
Input Charging	Ac Adapter: Dc19V/5A Car Charger: 19V/2.5A Solar Panel** MPPT, 18V-24V/5 (Max)
Fully Charged Time	Adapter: DC19V/5A:7-8 hours
DC Output	2 x DC5521:12-16.8V/10A (14.5A Max)
4 USB Output	2 x USB-A: 5V/2.4A 1 x USB-A: QC3.0, 5-12/18W 1 x TYPE-C: QC3.0, 5-12/18W
2 AC Output	Pure Sine Wave Output: Rated Power: 500W(Peak Pwer: 1000W)
AC Voltage:	220-240
Cigarette Lighter Output	1x Cigarette Lighter Output:12-16.8V/10A (14.5A Max)
Dimension (LXBXH)	310*170*213MM
Power Indicator	LCD Display
Operating Temperature	-10°C - +40°C
Life-cycles	1000
Package Contents	1 x Portable Power Supply 1 x Ac Adapter 1 x Car Charger 1 x Solar DC Cable 3mtr

Solar Panel (purchase separately) 100W



## SOLAR MOBILE CHARGER

### PRODUCT SPECIFICATIONS

Model	SPC-PET-100W
Fold	Single Fold
Solar Panel	100W Sunpower
Efficiency	>23.5%
Material	ETFE+PTE Laminated & Fabricated
Output	5-18V*2.1-5.5A
Output Interface	Smart IC Controller with Single USB
Charging Point	USB* 1pc DC* 1pc
Waterproof	Yes
Warranty	1 Year
Dimensions (cm)	53x55x3
Folded	107x55x15
Unfolded	1 x DC Charging Cable
Package	1 x SAE to DC Conversion Cable
Inclusions	1 x Apple Connector 10 x Laptop Connectors 1 x Alligator Clip






## MODEL SPC-ETFE SERIES

### PRODUCT SPECIFICATIONS

Model	SPC-ETFE-10W	SPC-ETFE-15W	SPC-ETFE-20W
Solar Panel	10W Sunpower	15W Sunpower	20W Sunpower
Fold	Single Fold	Single Fold	Double Fold
Efficiency	>23.5%	>23.5%	>23.5%
Color	Red	Green	Red
Material	ETFE+PTE Laminated & Fabricated		
Output	All Kind of 5V Devices		
Output Interface	With Smart IC Controller with Single USB		
Charging Point	USB* 1pc	USB* 1pc	USB* 1pc
Waterproof	Yes	Yes	Yes
Warranty	1 Year	1 Year	1 Year
Package Inclusions	2 x Spring Snap Hook		
Dimensions (cm)			
Folded	16x26x1	16x30x1	16x30x2
Unfolded	32x26x0.5	33x30x0.5	50x30x0.5

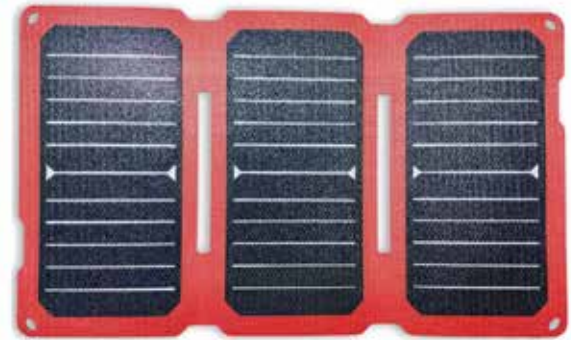

## MODEL SBP012

12W

### PRODUCT SPECIFICATIONS

Model	SPECTC-SBP012
Solar Panel	5V 12W WITH Monocrystalling Cell
Output	USB * 2pc, %V 2.A max
Material	Jacquard PVC600D
Size	35cm Wx52cm Hx70cm
Weight	0.72 KGS
Color	Purple + Grey
Warranty	1 Year against any manufacturing defect

12W

2 USB PORT

0.72KG









## MODEL SBP013

10W



10W

1 USB PORT

1.1KG

### PRODUCT SPECIFICATIONS

Model	SPECTC-SBP013
Solar Panel	5V 10W with Monocrystalling Cell
Output	USB * 1pc, 5V 2A max
Material	Canvas
Size	60cm Wx32cm Hx20cm
Weight	1.1 KGS
Color	Black + Grey
Warranty	1 Year against any manufacturing defect

## MODEL SBP014

12W

### PRODUCT SPECIFICATIONS

Model	SPECTC-SBP014
Solar Panel	5V 12Wwith Polycrystalline Cell
Output	USB * 1pc, 5V 2.4A max
Material	Canvas
Size	60cm Wx45cm Hx17cm
Weight	0.9 KGS
Color	Black + Grey
Warranty	1 Year against any manufacturing defect

12W

1 USB PORT

0.9KG





## SOLAR CAMERA BAG

# MODEL SBP024 24W



### PRODUCT SPECIFICATIONS

Model	SPETC-SBP-C24 Solar Powered Camera Bag
Solar Panel	5V 10W with Polycrystalline Cell
Output	USB * 1pc, DC*1pc,
DC	1pc 9-18V
Material	Canvas
Size	22cm W* 32.5cm H*19cm D
Weight	1.3 KGS
Color	Green + Yellow
Warranty	1 Year against any manufacturing defect

**24W**  
POLY CELL

**1.3KG**

**1+1**  
USB & DC PORT

## SOLAR MODULE CLEANING BRUSH

### PRODUCT SPECIFICATIONS

	Folded Length	Extended Length	Brush Length	Brush Width
MCB 12 Ft	4 Ft	12 Ft	2 Ft	2 inch
MCB 18 Ft	5.5 Ft	18 Ft	2 Ft	2 inch
MCB 24 Ft	7 Ft	24 Ft	2 Ft	2 inch

TYPE

Telescopic



## SOLAR MODULE WIPER



Blade Length	12 inch
Material	Stainless Steel

Accessory included for attachment with Module Cleaning Brush



SARRVAD




**A RAY OF LIGHT**

*In everything you use*





**SYNERGY WAVE SYSTEM LLP**

317, SUNCITY SUCCESS TOWER, GOLF COURSE EXT ROAD, SECTOR 65, GURUGRAM  
0124 284 1111-12 | INFO@SYNERGYSOLARWORLD.COM  
WWW.SYNERGYSOLARWORLD.COM

 synergy wave system llp

 synergywavesystemllp

 synergywavesys1

 synergy wave system llp